

TRUE GAIN ANTENNAS

All The Signal...®

True Gain's Mighty Mini 5.8 GHz panel delivers high performance over the entire ISM band in any weather. The antenna easily installs in most any application with the included Maxi-Position Mount™.


Applications:

- Broadband networks
- Canopy & Ubiquiti radios
- Point to multipoint
- UNII & ISM
- Wireless bridges
- Wireless LAN



TG-MM5800-17 Features -

- **Lifetime Warranty:** Materials and Workmanship
- **Maxi-Position Mount™**
- **Length:** 8.8" (22.4 cm)
- **Width:** 7.5" (19.1 cm)
- **Height:** 3.8" (9.6 cm)
- **Weight:** 13.5 oz. (0.38 kg)
- **Rugged Environmental Resistant**
- **Environment:**
 - Operational: 100 mph (161 Km/hr.)
 - Survival: 100 mph (161 Km/hr.)
- **Connection:** 18" LMR 200 w/ N, RP-SMA, or SMA

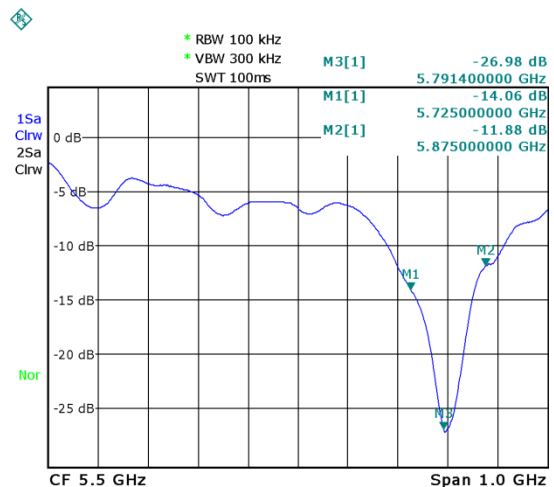

VSWR

M1 = 5.73 GHz, 1.49
 M2 = 5.88 GHz, 1.69
 M3 = 5.79 GHz, 1.09

Electrical Specifications:

Model	Frequency (GHz)	Polarization	Gain (dBi) @ 5.8 GHz	Beamwidth (°) -3 dB @ 5.8 GHz	F/B (dB) @ 5.8 GHz	VSWR
TG-MM5800-17	5.6 - 5.9	Linear	17.6	23.8	31.1	1.10:1

Specifications subject to change without notice.