


TRUE GAIN ANTENNAS

All The Signal...™

Model TG-Y915-15 Yagi Antenna Assembly Instructions

1. Unpack the antenna and hardware. Parts list is below.
2. Check hardware contents against parts list.
3. If your antenna has been supplied with the driven element removed from the boom, install the driven element now. If the antenna is to be mounted horizontally-polarized, the driven element should be installed so that the coax feedline connector is on the bottom of the antenna. See the below, left illustration.

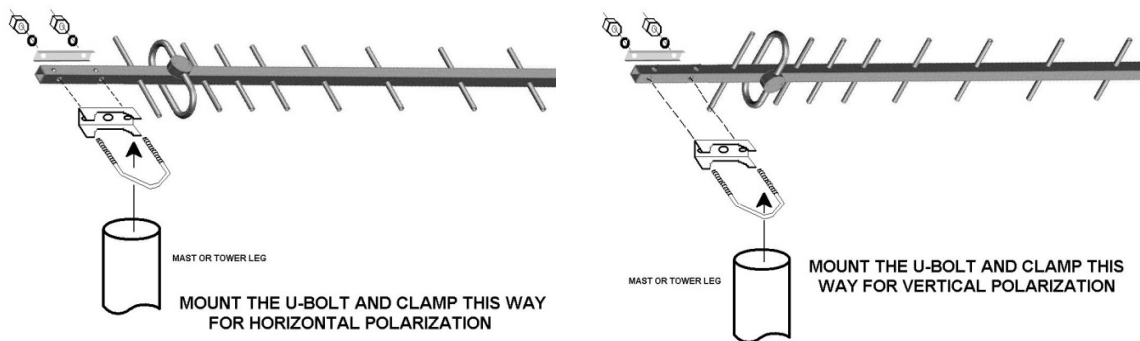

4. Mount the antenna to the mast using the provided U-bolt and mast saddle as shown above. Remember to place the provided lock washers under the nuts. Before tightening the mounting nuts, point the front of the antenna (opposite end of the clamp mount) in the direction of maximum signal.
5. Connect the antenna cable making sure the connector is tight. Use appropriate waterproofing tape (e.g., Coax-Seal®) or compounds so that water will not get into the connector. Securely tape or fasten the feedline to the mast, then down the mast and/or tower every several feet.

Model TG-Y915-15 12 Element Yagi Parts List

<u>QUANTITY</u>	<u>DESCRIPTION</u>
1	12 Element Yagi
1	3", 1/4 x 20 U-bolt
1	3" Mast Saddle
1	Boom Shim
2	1/4" Serrated Flange Nuts; 18-8

** If OPTIONAL element end-caps are included, firmly press the provided end-caps into each of the open-ended element tubes.*